


Case A: W-201 R1, synthetic wall finish. All stated dimensions are metres.

Wall 7.2 x 3.1; opening O1 = 1.2 x 2.1. Project convention: deduct opening in full.

Supply: 80 per purchased m²; material waste 5%. Installation: 45 per net m²; no labour waste.

Use currency units. These are supplied exercise prices, not market evidence. No tax/additions.

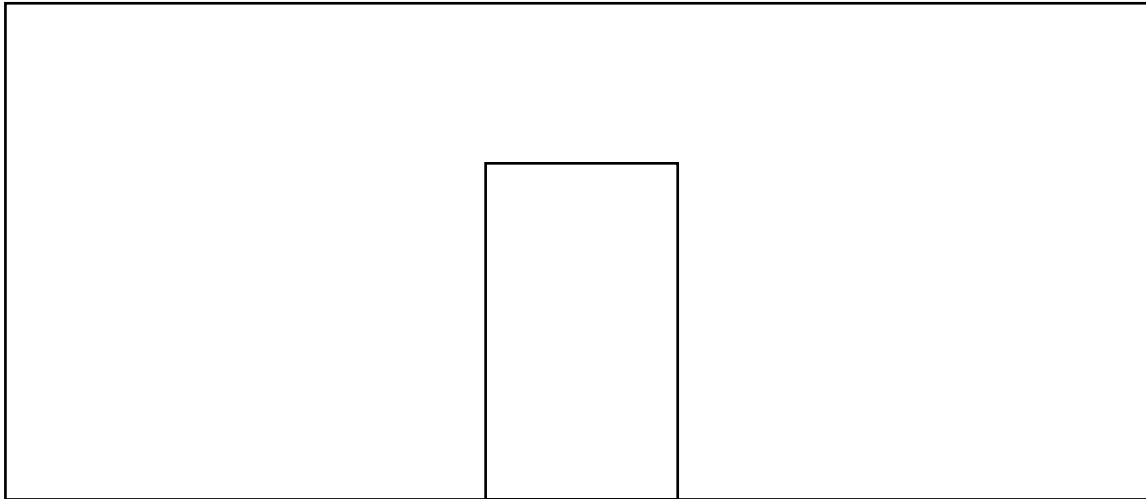

W-201 R2 changes only wall height to 3.4 m; same opening and prices.

Case B: V-202 R1. Imported viewport; no written dimensions for target T1.

Control rectangle dimension labels: width 4 m; height 2 m.

Choose and declare calibration tolerance before independent X/Y verification.

Do not rectify nonuniformly: original geometry/projection is unverified. Query failed calibration.



Control: 4 m x 2 m




Target T1; no dimensions or price supplied

Case C: F-203 R1. Two rooms have the same finish description; preserve their identities.

Room P = 6.5 x 4 m. Room Q = 3 x 5 m. Net rectangular floors, no deductions.

Owner supplies stone. GC installation rate = 52 currency units/m², including ordinary bedding.

No stone purchase rate, waste/yield, or additional levelling scope supplied.



P: 6.5m x 4m

